

Trunnion bearing mounting for a 100-ton- CLU converter for stainless steels

FAG


Examples of Application Engineering

Publ. WL 17 523 EA



Manufacturer: Voest-Alpine Industrieanlagenbau, Austria · Operator: Columbus Middelburg, South Africa

SCHAEFFLER GROUP
INDUSTRIAL

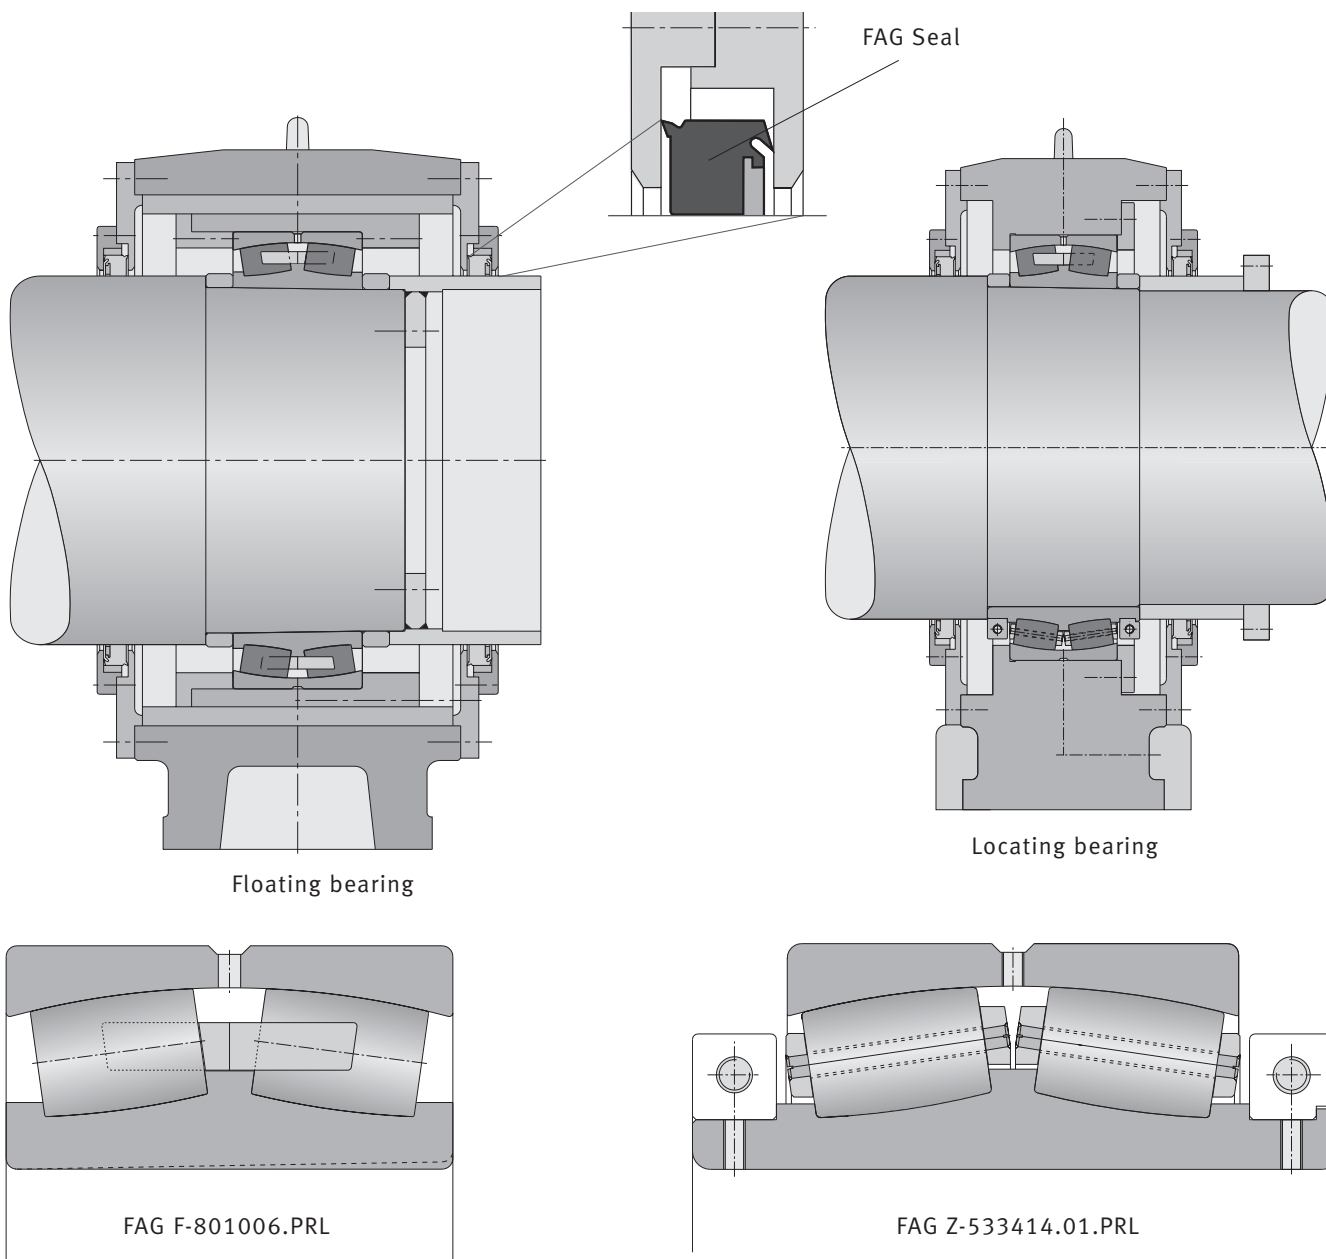

Operating data

Trunnion diameter 750 mm

Bearing mounting

Housing VOEST with FAG seal
Spherical roller bearing FAG F-801006.PRL
Dimensions 750×1000×250 mm

Without modifying the surrounding structure, i.e. just by omitting the spacer rings, it is also possible to use a split spherical roller bearing as locating bearing. With split spherical roller bearings the mounting time is reduced considerably.

Split spherical roller bearing FAG Z-533414.01.PRL
Dimensions 750×1000×355/250 mm

Fits

Shaft m6
Housing H8

Lubrication

The converter trunnion bearings are lubricated with a lithium soap base grease with EP additives (KP2K-20) in accordance with DIN 51825.

Schaeffler KG

Heavy Industries - Steel
Postfach 1260
97419 Schweinfurt (Germany)
Phone +49 9721 91-3167
Fax +49 9721 91-3100
E-mail steel@schaeffler.com
Internet www.fag.com